



Installation and Setup Guide

This bi-directional wireless sensor is intended for use with Honeywell Home controls that support PROSiX™ series devices.

To activate, press and hold the button about 3 seconds until the LED flashes. To clear the alarm at the control, enter a user code. To clear memory of alarm, select Disarm and enter a user code.



The device can be used with a belt clip, lanyard, or wristband.



ENROLL AND PROGRAM THE PROSiXMED

Follow instructions in the Controller's programming guide.

1. Set the controller in Programming Mode.
2. Press and hold the button for about 3 seconds until the LED flashes to activate the enrollment process.
3. The LED flashes green during enrollment (up to about 20 seconds). The device sends its unique MAC ID (Serial Number) and Services information to the controller.

NOTE: Enrollment time varies depending on the signal strength between the device and the controller.

4. When done, the LED lights solid green for 3 seconds to confirm enrollment.

If enrollment is not confirmed, press and hold the button again for about 3 seconds to restart the enrollment process.


IMPORTANT: Once enrolled in a system, the PROSiXMED cannot be used with another controller until it is removed from the current controller. When removed from a system, the sensor will revert to factory default settings.

After Enrolling: Verify adequate signal strength by conducting a sensor test (see controller's instructions).

LED Indications

Green flashing: lights when unit is transmitting
Red Flashing: indicates low battery (lights during button press)

You must enroll the device in the control. Refer to the control's programming instruction for detailed procedures.

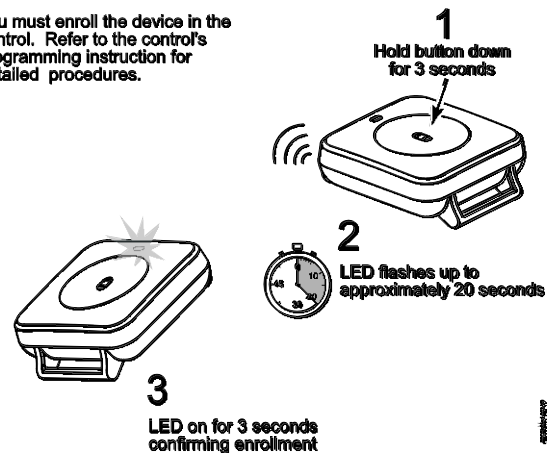


24-HOUR ENROLLMENT DELETION AND DEFAULT

If the device is enrolled in a panel different than the intended panel, and you are unable to delete it from the unintended panel, reset the device to factory default setting: Press and hold the button for 15 seconds. When successful the LED flashes.

The device self-deletes from the panel it was enrolled in.

This procedure is available for 24 hours after enrollment with a panel and the device remains powered (battery installed).


Press and hold button 15 seconds.



BATTERY REPLACEMENT

To replace the battery:

1. Remove the screws from the back housing and use a screwdriver to gently separate the front and back housings.
2. Use a screwdriver to carefully remove the battery.
3. Wait 10 seconds or press a button for 2 seconds to ensure full power discharge.
4. Insert a new 3V Coin Cell battery as shown. Recommended replacement battery:
Recommended Batteries: 3V Coin Cell
Duracell DL2450; Resideo BL3-0004 (CR2450)
Panasonic CR2450; Energizer CR2450
5. Replace the front housing and secure the housings with the cover screw.

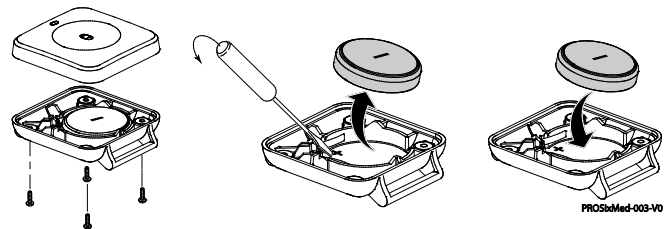

Replacing the Battery

BATTERY CAUTION: Risk of fire, explosion and burns. Do not recharge, disassemble, heat above 212°F (100°C) or incinerate. Dispose of used batteries properly. Keep away from children.

NOTE: Constant exposure to high or low temperature or high humidity may reduce battery life.

SPECIFICATIONS

Battery: 1 x 3V Coin Cell, Duracell DL2450; Resideo BL3-0004 (CR2450)
Panasonic CR2450; Energizer CR2450

RF Frequency: 2.4GHz

Operating Temperature: 0° to 50° C / 32° to 122° F
(Agency compliance 0° to 49° C / 32° to 120° F)

Relative Humidity: 95% max. (Agency compliance – 93% max.),
non-condensing

Dimensions: 0.5" H x 1.5" L x 1.5" W / 13 mm H x 38 mm L x 38 mm W

APPROVAL LISTINGS:

FCC / IC
cETLus Listed
Conforms to UL 1023,
UL 985, & UL1637
Certified to
ULC ORD-C1023
& ULC-S545

Home Health Care,
Household Fire &
Burglar Control
Unit Accessory

Other Standards:
RoHS



Product must be tested at least once each year.

IMPORTANT SECURITY NOTICE

Please inform the User about the security importance of their wireless sensor, and what to do if it is lost.

They should immediately notify the Dealer/Installer of a lost or stolen sensor. The Dealer/Installer will then remove the sensor programming from the security system.

FEDERAL COMMUNICATIONS COMMISSION (FCC) & INDUSTRY CANADA (IC) STATEMENTS

The user shall not make any changes or modifications to the equipment unless authorized by the Installation Instructions or User's Manual. Unauthorized changes or modifications could void the user's authority to operate the equipment.

CLASS B DIGITAL DEVICE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, as defined by FCC Rules Part 15.105. The Class B Digital Device statement can be viewed at:

<https://customer.resideo.com/en-US/support/residential/codes-and-standards/FCC15105/Pages/default.aspx>

FCC / IC STATEMENT

This device complies with Part 15 of the FCC Rules, and Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et exempt de licence RSS d'Industrie Canada. Son fonctionnement est soumis aux conditions suivantes: (1) Cet appareil ne doit pas causer d'interférences nuisibles. (2) Cet appareil doit accepter toute interférence reçue y compris les interférences causant une réception indésirable.

RF EXPOSURE

Warning – The antenna(s) used for this device must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC and ISED multi-transmitter product procedures.

Mise en Garde

Exposition aux Fréquences Radio : La/les antenne(s) utilisée(s) pour cet émetteur ne pas être située(s) ni fonctionner parallèlement à tout autre transmetteur ou antenne, excepté en conformité avec les procédures de produit multi transmetteur FCC et ISED.

REFER TO THE INSTALLATION INSTRUCTIONS FOR THE CONTROL WITH WHICH THIS DEVICE IS USED, FOR DETAILS REGARDING LIMITATIONS OF THE ENTIRE ALARM SYSTEM.

Responsible Party / Issuer of Supplier's Declaration of Conformity: Ademco Inc., a subsidiary of Resideo Technologies, Inc., 2 Corporate Center Drive., Melville, NY 11747, Ph: 516-577-2000

The product should not be disposed of with other household waste. Check for the nearest authorized collection centers or authorized recyclers. The correct disposal of end-of-life equipment will help prevent potential negative consequences for the environment and human health.

Any attempt to reverse-engineer this device by decoding proprietary protocols, de-compiling firmware, or any similar actions is strictly prohibited.

SUPPORT & WARRANTY INFORMATION

For the latest documentation and support, please go to:
www.resideo.com

For the latest warranty information, please go to:
www.security.honeywellhome.com/warranty

The Honeywell Home Trademark is used under license from Honeywell International Inc.
This product is manufactured by Resideo Technologies, Inc. and its affiliates.

resideo

2 Corporate Center Drive, Suite 100

P.O. Box 9040, Melville, NY 11747

© 2020 Resideo Technologies, Inc.

www.resideo.com



PROSIXMED 800-25226B 2/19 Rev B