

4 -11/16" x 1-5/16" x 4-1/4" 900-02769 11/16 Rev D Exterior (4.687" x 1.313" x 4.250")



DOOR/WINDOW SENSOR
Superior Perimeter Protection
SiXMINICT
128-bit AES Encryption

Dimensions: 0.45" (11.5mm) H x 1.25" (32mm) W x 2.44" (62mm) L



DOOR/WINDOW SENSOR
Superior Perimeter Protection
SiXMINICT



Honeywell | SiX™ Two-Way Wireless Technology

DOOR/WINDOW SENSOR
Superior Perimeter Protection
SiXMINICT



DOOR/WINDOW SENSOR


Part of a series of next-generation sensors featuring SiX™ Two-Way Wireless Technology, the Honeywell Sensor provides superior protection for doors and windows. The sleek, unassuming device blends with any décor and is an ideal choice when aesthetics are critical.

Includes Sensor, Magnet, CR2450 Battery (1), Mounting Hardware and Double-sided Tape
For indoor use only.

Simple Installation
Sends programming data right to the control panel when the battery tab is pulled.

No Touch Adjust
Devices can be adjusted remotely via AlarmNet 360™.

Simple Maintenance
User-replaceable batteries and system polling for device information saves time and maximizes efficiency.

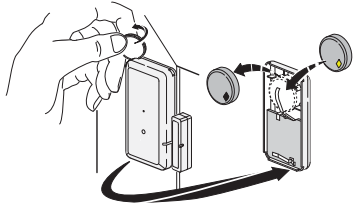

Designed in the USA.
Honeywell Security and Fire
2 Corporate Center Dr. Suite 100
P.O. Box 9040
Melville, NY 11747
www.honeywellsecurity.com | 1-800-323-4576

© 2016 Honeywell International Inc. All Rights Reserved. Country of Origin: Mexico.



SIXMINICT

DOOR/WINDOW SENSOR Specifications

Transmission Range: 200R (61 meters) plus*
Magnetic Breaking Gap:
Wood: 1.375" (35mm)
Steel: 0.625" (16 mm)
Frequency: 2.4 GHz
Battery Life: Three years (typical use)
Power Requirements:
3V Lithium (Qty 1)
Honeywell BL3-0004 (CR2450)
Duracell DL2450
Panasonic CR2450
Energizer CR2450
Tamper Protected: Yes
Dimensions:
0.45" (11.5mm) H x
1.25" (32mm) W x
2.44" (62mm) L
Approval Listings:
FCC/IC
ETL Listed to UL 634
cETL Listed to ULC/ORD-C634
Authorized Countries:
US/Canada/
Latin America
*Varies based on each installation due to environmental conditions.

Honeywell